

Application:

- * Operating temperature range is between -25°C~+40°C
- * Only for indoor application
- * Not for use with dimmers

Specification / Features:

Features:

- Long lifetime 25000hrs
- UV and IR radiation can be avoided
- Low temperature while high power operation
- Easy for installation
- Base with a variety of color can choose
- Mercury-Free
- Delivering nearly the same light output as incandescent bulb



Optical Performance:

- 3000k and 6500k CT Options

Electrical Specifications:

- Power Input: 110/240V
- Power Consumption: 3W-5W
- Base Type: E14
- Dimming Control Optional: No Dimming

Physical Dimensions

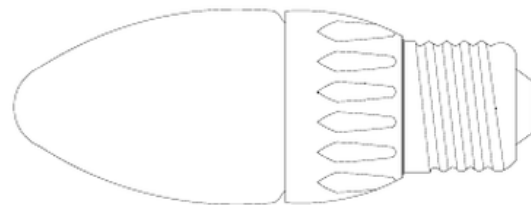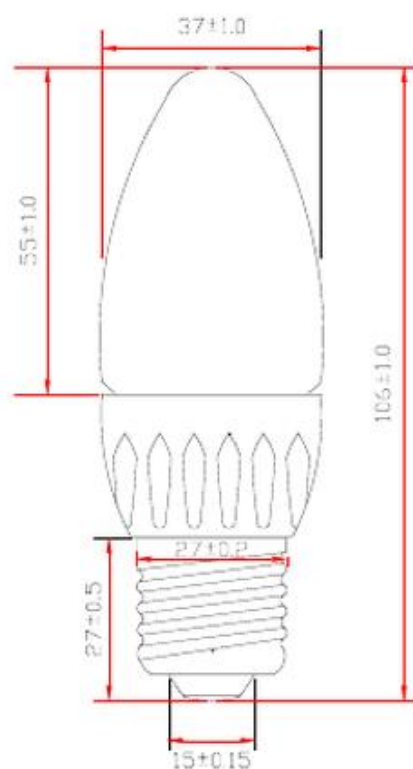

Project:		
Date:		Quantity:
Notes:		



**Certification Data:
CE RoHS Qualified**





www.jeragh-lighting.com

JERAGH LIGHTING CO.
© 2015 Jeragh Lighting. All Right Reseved.



Distribution curve:

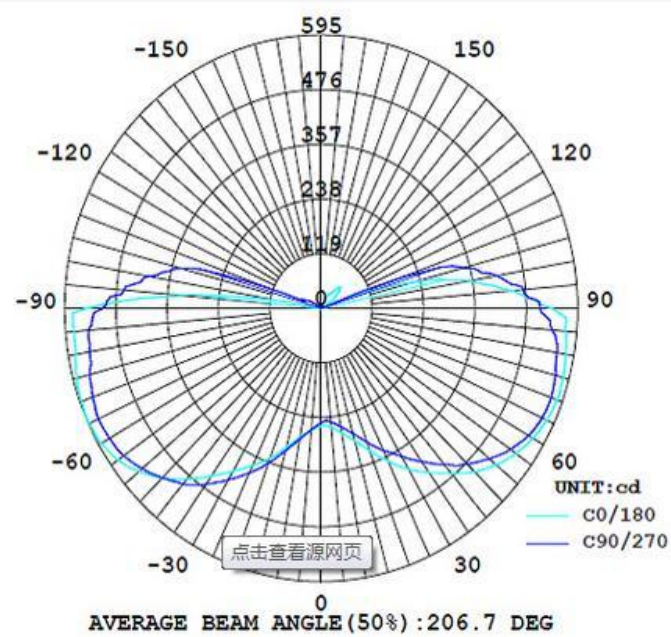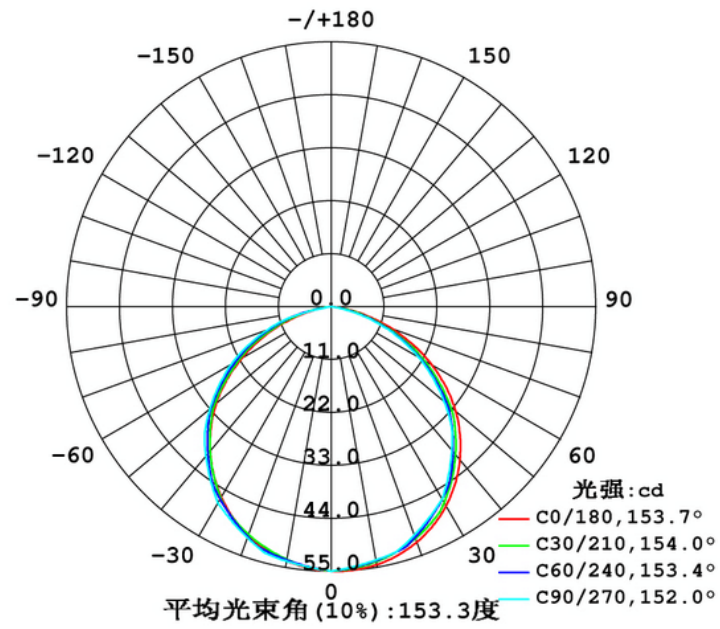

LED Performance Specifications:

Model	Wattage(W)	Input Voltage(V)	Frequency(HZ)	CCT(K)	LED Chip	Ra	Base Type	Beam Angle(°)
C30-Can-3	3	220-240V	50/60	3000	SMD2835	80	E14/E27	120°
C30-Can-3	3	220-240V	50/60	6500	SMD2835	80	E14/E27	120°
C30-Can-5	5	220-240V	50/60	3000	SMD2835	80	E14/E27	120°
C30-Can-5	5	220-240V	50/60	6500	SMD2835	80	E14/E27	120°

[*]Range of tolerance: ±10%

[*]Tolerance of Power: ±15% or ±0.5W

www.jeragh-lighting.com | info@jeragh-lighting.com
 TEL:+965 2572 0809 | FAX:+965 25740710 | P.O. BOX:5688-Safat-Kuwait