


IP65
PF ≥0.9
Ra ≥70
60 - 70lm/w
AC210 - 230V/50 - 60HZ

Project:		
Date:		Quantity:
Notes:		

Basic specifications of product:

- A、 Appearance as right image:
- B、 Light boundary dimension:190*251*52MM
- C、 Lamp net weigh:0.78±0.015KG
- D、 Lamp color:white body+ white ring/ white body+black ring
- E、 Material: lampshade-glass; lamp body - Alu.ADC12; reflector - Alu.1060;
- F、 LED Chip: 50W COB leds and driver on the same PCB board, 1PCS;
- G、 Power wire: conductor≥1.0mm²; wire length: ≥0.25m(Exposed); tail end: copper-clad
- H、 Power driving model: leds and driver on the same PCB board
- I、 IP grade: IP65; electrical shock protection grade:I Class;
- J、 Environment temperature: working -20°C~+45°C; storage -30°C~+60°C;
- K、 Environment humidity: working- 10%~75%; storage- 10%~90%
- L、 Lamp head: N/A
- M、 Others: Non dimmable, non-dimmable lamps

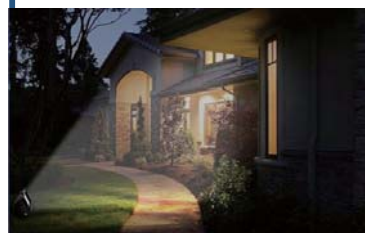


**Certification Data:
CE RoHS Qualified**



www.jeragh-lighting.com

JERAGH LIGHTING CO.
© 2015 Jeragh Lighting. All Right Reseved.

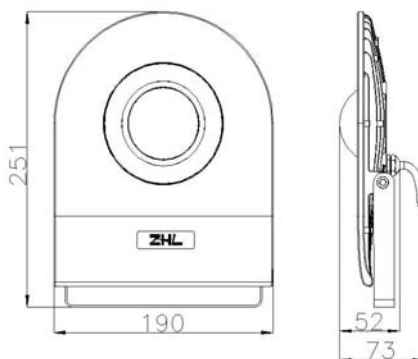


IP65
PF≥0.9
Ra≥70
60 -70lm/w
AC210 -230V/50 -60HZ

Project:		
Date:		Quantity:
Notes:		

Basic specifications of product:

- A、 Appearance as right image:
- B、 Light boundary dimension:240*220.5*57.7MM
- C、 Lamp net weigh:947g±10g
- D、 Lamp color:white body+ white ring/ white body+black ring
- E、 Material: lampshade-glass; lamp body - Alu.ADC12; reflector - Alu.1060;
- F、 LED Chip: 50W COB, 56chips, 1PCS;
- G、 Power wire: conductor≥1.0mm²; wire length: ≥0.25m; tail end: copper-clad
- H、 Power driving model: leds and driver on the same PCB board
- I、 IP grade: IP65; electrical shock protection grade:I Class;
- J、 Environment temperature: working -20°C~+45 C; storage -30°C~+60°C;
- K、 Environment humidity: working- 10%~75%; storage- 10%~90%
- L、 Lamp head: N/A
- M、 Others: not dimmable, -dimmable lamps

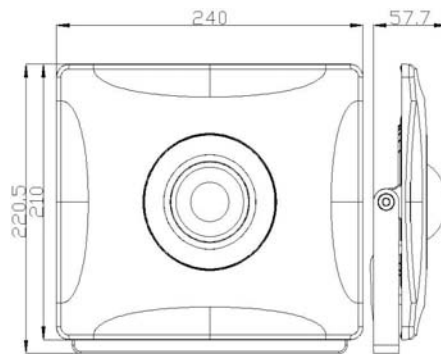

Certification Data:
CE RoHS Qualified



www.jeragh-lighting.com

JERAGH LIGHTING CO.
© 2015 Jeragh Lighting. All Right Reseved.



